

# Clad Alignment Fusion Splicer

# 45S



## *The Essential Splicer*

Faster operation  
User-friendly design  
Consistent quality

 **Fujikura**

 **BS**  
TELEKOM


# Faster operation

## ■ Simultaneous fiber preparation

Fiber preparation, stripping, cleaving, and setting in the splicer usually needs repeating separately for both left and right-side fibers. The 45S process does away with that and enables simultaneous fiber preparation thanks to the new SS05 double fiber stripper, the new AD-60A fiber adapter for the CT60 cleaver and the cleaver set plate mechanism of the 45S itself.

### ● Simultaneous fiber stripping


The SS05 fiber stripper is equipped with four blades: ① for 2mm/3mm, ② for 900µm, ③④ for 250µm fibers. Using blades ③ & ④ allows simultaneous stripping of 250µm fibers.

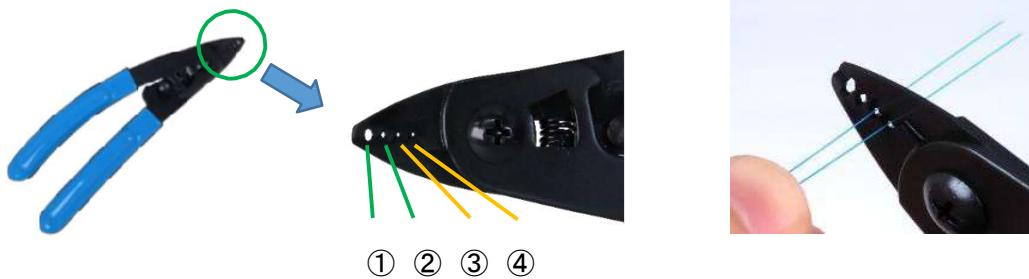

Fiber Stripper SS05

### ● Simultaneous fiber cleaving


The new AD-16A fiber adapter for the CT50 cleaver is equipped with two grooves. Placing one fiber in each groove provides simultaneous cleaving.

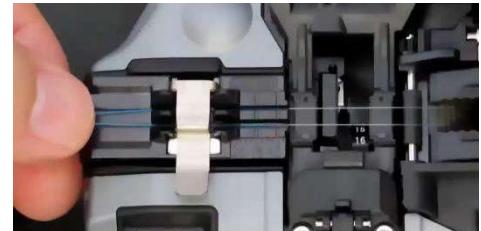

Optical Fiber Cleaver CT50

### ● Simultaneous fiber setting


Previous fusion splicers required two-handed operation to close fiber clamp and hold the fiber. Thanks to a new clamp mechanism, the 45S close with fiber setting and provides one-handed fiber setting and simultaneous fiber setting.

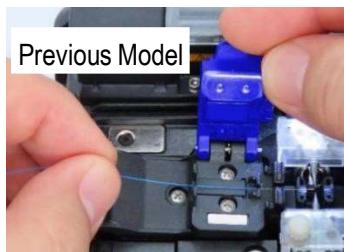

Two-handed



One-handed

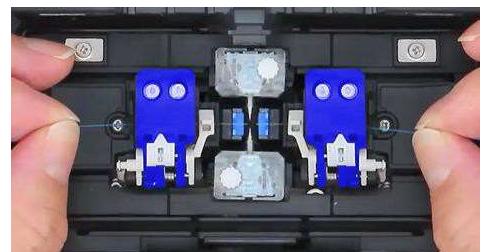

Simultaneously fiber setting

Refer to the movie



# Faster operation

## ■Faster fiber transportation time

The 45S is equipped with a mechanism linking the wind protector and fiber clamp so when you open wind protector, the fiber clamps opens automatically.

The 45S is also equipped with retention clamps which are reputed by our conventional fusion splicer models. The retention clamps prevent the fiber from jumping out after the fiber clamps are opened.

These mechanisms work in tandem to provide easy fiber handling and a reduction in the time it takes to transfer the fiber to the heater.



Refer to the movie



Fiber retention clamps

## ■Faster heating time

The heater for shrinking the reinforcing sleeve is designed to heat the reinforcing sleeve between two heaters in the front and rear.


It shorten 15% of the heating time in case of using FP-03 sleeve.



※Measured at room temperature with the AC adapter. The heat time is defined from the start beep sound to the finish beep sound. The average heat time changes depending on the environmental conditions, sleeve type and battery pack condition. In addition, since the heating operation is constantly optimized, the average heating time changes depending on the usage conditions of the fusion splicer.

## ■30% faster than previous model

Thanks to the way the 45S streamlines the preparation process, reduces transport time and delivers faster heating, it is 30% faster than the 41S+ it replaces.

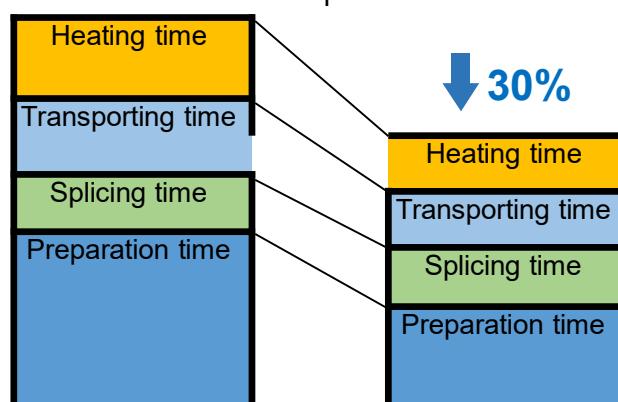

Previous Model

45S


# User-friendly design

## ■Movable LCD monitor

The 45S is equipped with a movable 4.95-inch color LCD monitor to ensure optimum visibility in a range of conditions, even when outside under direct sunlight.



## ■Easy sleeve positioning

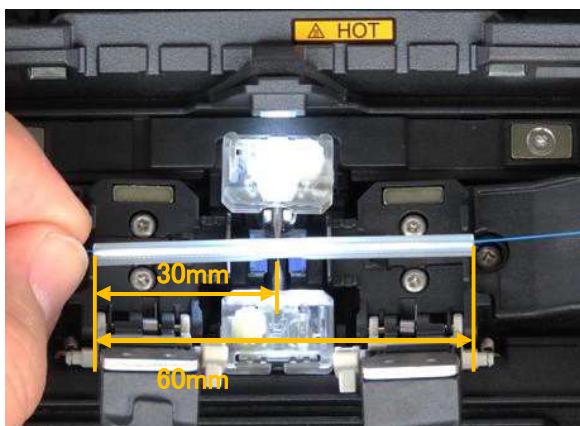

The space between the edges of the left and right fiber clamp edges is 60mm, as per the image to the left. This distance allows for easy sleeve positioning, with the splice point positioned in the middle of the sleeve. The scale on the heater shows the guide for other sleeve lengths, for example 40mm.


## ■Removable battery

The removable battery makes replacement easy and convenient.



## ■Smaller footprint

The cube shape provides a reduced base area while also giving the user a large operating space.

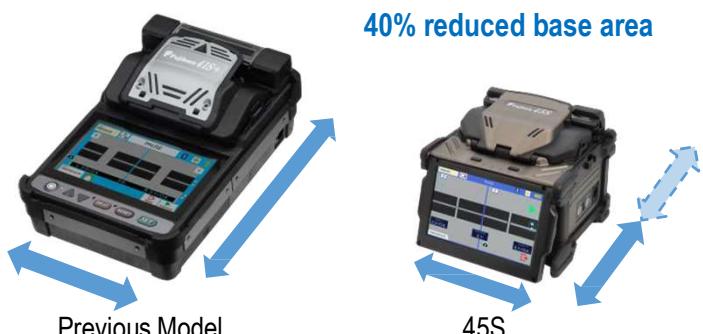

# User-friendly design

## ■Carrying case with work tray

The configurable 45S carrying case provides various usage configurations.



Configuration example 1  
Open the carry case and start operation.




Configuration example 2  
Remove the work tray and put on top of the carry case.

Removing the work tray from the carry case allows the tray to expand. Using the work tray with the strap provides a portable work surface and the strap can be fixed to the work tray at the sides of the splicer to secure the usability.



Secure working space

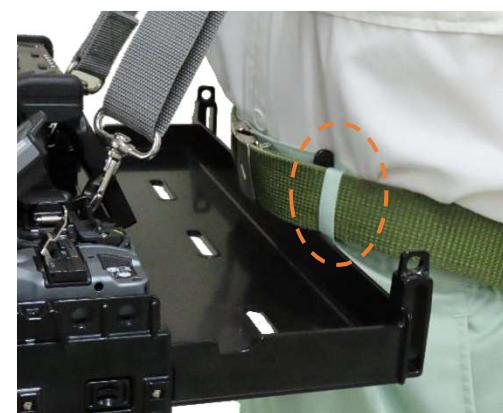

Increased security when used with a belt

# Consistent quality



## ■ Active Fusion Control

The 45S is equipped with Fujikura Active Fusion Control Technology, which analyses the fiber image during fusion and controls the arc discharge accordingly. The result is stable splice loss irrespective of the environment.



### ● Control by fiber cleaved surface

A bad cleave end face is a potential reason for high splice loss. The 45S can address this because it's equipped to control fusion according to the condition of the cleaved surface. This function helps reduce splice loss by compensating for poor cleaves.

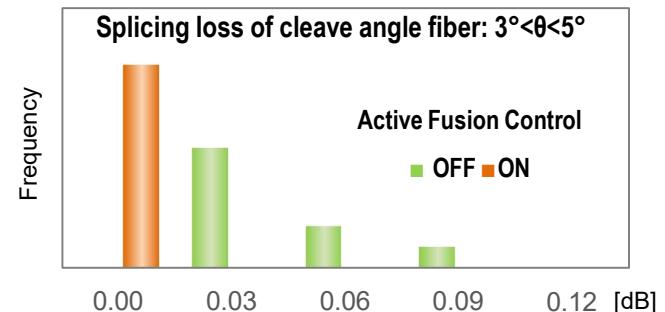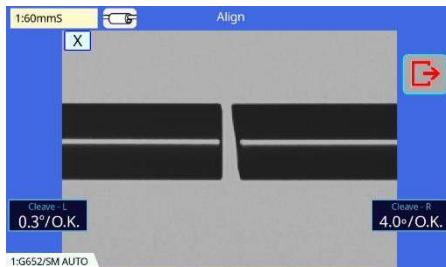


※Fujikura test result of ITU-T G652 fibers measured by cut-back method.

The splice loss may vary depending on operating environment or fiber characteristics.

### ● Real-time fusion control

The 45S analyses the fiber image during fusion and controls fusion power according to the real-time condition of the fiber. This helps to minimize splice loss irrespective of the environment.

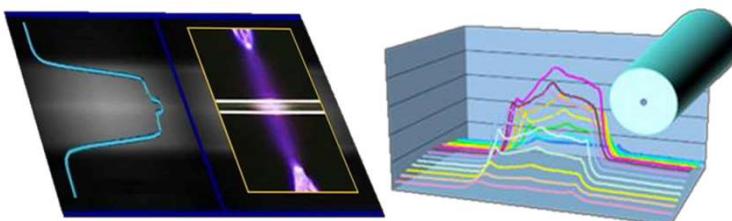

Analyzing fiber image during fusion

This process also provides Warm Splice Image (WSI) technology. WSI analyses during the splice and provides loss estimation, even though the 45S is a clad alignment splicer.

It would help to prevent the case of "good loss estimation but bad actual loss".

## ■ Active Blade Management

The 45S monitors the blade condition of the CT60 cleaver via wireless communication.



When the 45S judges that the blade is worn, it will command the CT60 to rotate the blade to a new position to ensure the CT60 keeps delivering consistent cleaving performance.




# Additional features

## ■ Splice+ app

The Splice+ app provides convenient splicer management by wireless communications, between the 45S and mobile phone.



## ● Smart lock

A break in the pairing of wireless communication between the splicer and mobile phone can lock the splicer which prevents misuse and works as an anti-theft measure.

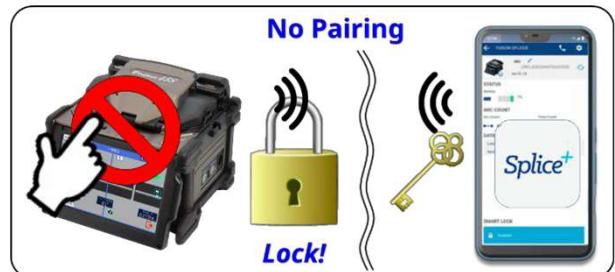

## ● Data management

The data management function retrieves data from the splicer and saves it to the cloud. This data can include the GPS data of a phone, which is useful for splicer operation management.

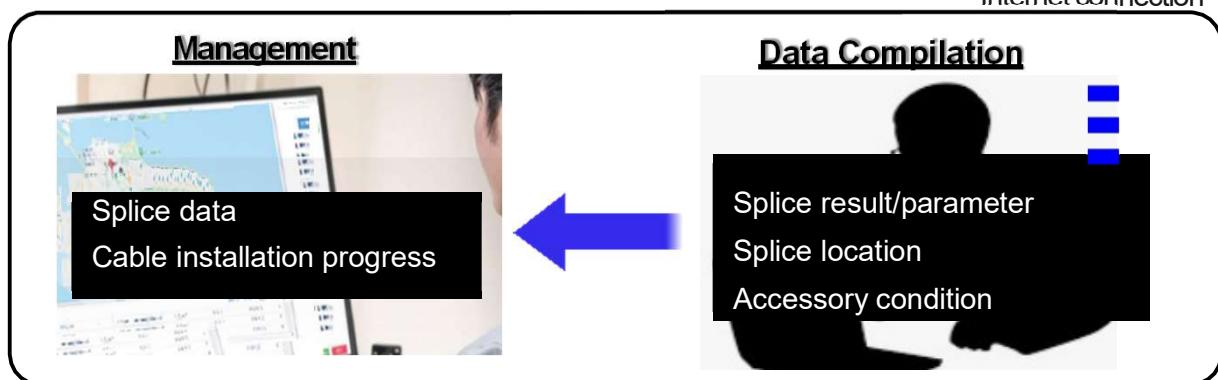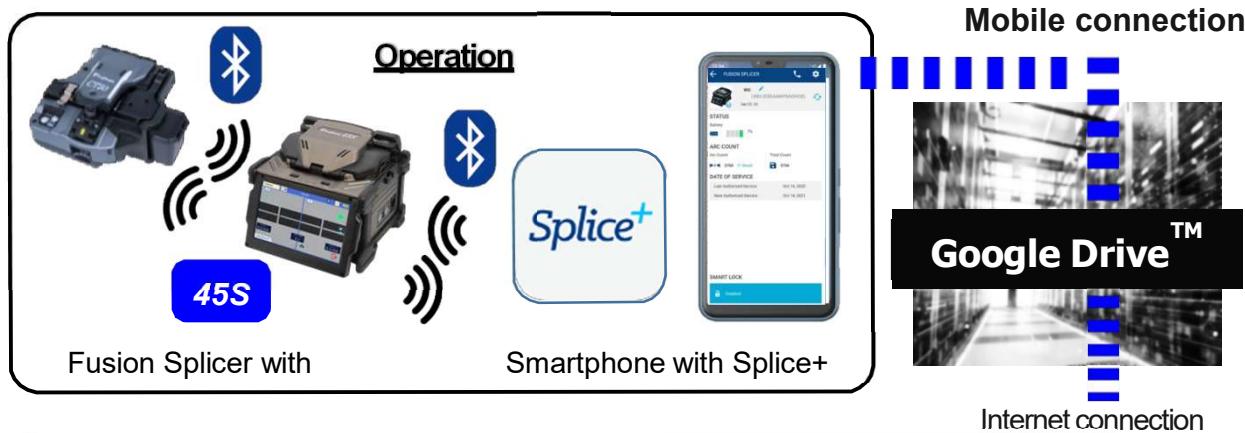

You can find and obtain Splice+ App from Google Play and App Store.



Note: Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.  
Google Drive is trademarks of Google LLC.

# Specifications/Items

## 45S Standard Items

Item	Model	Qty
Clad Alignment Fusion Splicer	45S	1 pc
(1) Battery Pack *	BTR-17	1 pc
(2) AC Adapter	ADC-21	1 pc
(3) AC Power Cord	ACC-08, 09, 10, 11 or 12	1 pc
(4) USB Cable	USB-01	1 pc
(5) Electrodes, for spare	ELCT2-16B	1 pair
(6) Carrying Case	CC-45	1 pc
(7) Work Tray	WT-10	1 pc
(8) Tripod Screw	TS-03	1 pc
(9) Carrying Case Strap	ST-04	1 pc
(10) Alcohol Dispenser	AP-02	1 pc
(11) Quick Reference Guide	QRG-08-E, C or J	1 pc
Single Fiber Stripper	SS05	1 pc
Optical Fiber Cleaver	CT60	1 pc
(1) Fiber Scrap Collector	FDB-07	1 pc
(2) Fiber Setting Plate	AD-60A	1 pc
(3) Case, for cleaver	CC-49	1 pc
(4) Hexagonal Wrench	HEX-01	1 pc



\* Please follow IATA regulation when shipping the battery by air

45S 	(1) 	(2) 	(3) 	(4) 
(5) 	(6) 	(7) 	(8) 	(9) 
(10) 	(11) 	SS05 		
CT60 	(1) 	(2) 	(3) 	(4) 

# Specifications/Items

## 45S Specifications

Item	Specification	
Fiber alignment method	Active clad alignment	
Fiber count can be spliced	Single fiber	
Applicable fiber	Fiber type	Single mode optical fiber Multi mode optical fiber
	Cladding dia.	Approx.125μm
Applicable coating	Sheath clamp	Coating dia. : Max. 3000μm Cleave length : 5 to 16mm *1
Fiber splice performance	Splice loss *2	ITU-T G.652 : Avg. 0.03dB ITU-T G.651 : Avg. 0.01dB ITU-T G.653 : Avg. 0.05dB ITU-T G.655 : Avg. 0.05dB ITU-T G.657 : Avg. 0.03dB
	Splice time *3	SM FAST mode : Avg. 6 to 8sec.
Applicable Protection sleeve	Sleeve type	Heat shrinkable sleeve
	Sleeve length	Max. 66mm
	Sleeve dia.	Max. 6.0mm before shrinking
Sleeve heat performance	Heat time *4	60mm mode : Avg. 21 to 23sec. 60mm slim mode : Avg. 16 to 18sec.
Fiber tensile test force		Approx. 2.0N
Electrode life *5		Approx. 6,000 splices
Physical description	Dimensions W	Approx.131mm without projection
	Dimensions D	Approx.123mm without projection
	Dimensions H	Approx.121mm without projection
	Weight	Approx. 1.4kg including battery
Environmental condition	Temperature	Operate: -10 to 50 °C Storage: -40 to 80 °C
	Humidity	Operate: 0 to 95%RH non-condensing Storage: 0 to 95%RH non-condensing
	Altitude	Max. 5000m
AC adaptor	Input	AC100 to 240V, 50/60Hz, Max. 1A
Battery pack	Type	Rechargeable Lithium Ion
	Output	Approx. DC14.4V, 3190mAh
	Capacity *6	60mm mode: Approx. 200 splice and heat cycles 60mm slim mode: Approx. 230 splice and heat cycles
	Temperature	Recharge: 0 to 40 °C Long Term Storage : -20 to 30 °C
	Battery life *7	Approx. 500 recharge cycles
Display	LCD monitor	TFT 4.95 inches with touch screen
	Magnification	Approx. 132 to 300x
Illumination	V-grooves	LED lamp
Interface	PC	USB2.0 Mini B type
	External LED lamp	USB2.0 A type Approx. DC5V, 500mA
	Wireless *8	Bluetooth 5.2
Data storage	Splice mode	100 splice modes
	Heat mode	30 heat modes
	Splice result	20,000 splices
	Splice image	100 images
Screw hole for tripod		1/4-20UNC
Other features	Automatic functions	Fusion control Blade management and control
	Reference guide	PDF file stored in splicer
	Sheath clamp	Open with/without Wind Protector Close with fiber setting Easy sleeve positioning clamp
	Electrode	Replaceable without tool



### Notes

\*1 Cleave length range depending on fiber type  
5 to 16mm:125μm cladding dia.and 250μm coating dia  
10 to 16mm: 125μm cladding dia. and 400 or 900μm coating dia.i.

5 to 10mm:80μm cladding dia. and 160μm coating dia.  
5 to 16mm:150μm cladding dia.and 250μm coating dia

\*2 Measured with a cut-back method relevant to ITU-T and IEC standard after splicing Fujikura identical fibers. The average splice loss changes depending on the environmental condition and fiber characteristics.

\*3 Measured at room temperature. The definition of splice time is from the fiber image appeared in LCD monitor to the estimated loss displayed. The average splice time changes depending on the environmental conditions, fiber type, and fiber characteristics.

\*4 Measured at room temperature with the AC adapter. The heat time is defined from the start beep sound to the finish beep sound. The average heat time changes depending on the environmental conditions, sleeve type and battery pack condition. In addition, since the heating operation is constantly optimized, the average heating time changes depending on the usage conditions of the fusion splicer.

\*5 The electrode life changes depending on the environmental conditions, fiber type and splice modes.

\*6 Test condition  
(1) Splice and heat time:1 minute cycle  
(2) Using the splicer power save settings, subject to our testing condition.  
(3) Using a not degraded battery  
(4) At room temperature

The battery capacity changes when testing with a different conditions from the above.

\*7 The battery capacity decreases to a half after approx. 500 discharge and recharge cycles, The battery life is shortened further when using outside of the storage temperature range, operating temperature range, if completely discharged by storing for a long time without recharging.

\*8 Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.

## 45S Optional Items

Item	Model	Remarks
Fiber Holder	FH-70-200	200μm coating diameter
	FH-70-250	250μm coating diameter
	FH-70-900	900μm coating diameter
	FH-FC-20	900μm in 2mm diameter cable
	FH-FC-30	900μm in 3mm diameter cable
Sheath Clamp	CLAMP-S35B	900μm loose buffer cable
Fiber holder set plate	SP-04	Fiber holder set base
Transfer Clamp	CLAMP-DC-12	Transferring drop cable on work tray
Protection sleeve	FP-03	60mm, Max. 900μm coating diameter
	FP-03(L=40)	40mm, Max. 900μm coating diameter
	FP-03M	FP-03 with magnetic material

# Specifications / Items

## CT60 Specifications

Item		Specification
Applicable fiber	Fiber type	Single mode optical fiber Multi mode optical fiber
	Fiber count	Single and up to 16 fiber ribbon
	Cladding dia.	Approx. 125µm
	Fiber setting plate	AD-60A: Max. 900µm coating diameter AD-60B: Max. 3mm coating diameter AD-60A : Max. 900µm coating diameter 1 fiber + Max. 250µm coating diameter 1 fiber
Applicable coating	Fiber holder	Coating shape: Refer to splicer options
	Fiber setting plate	AD-60A: 5 to 20mm *1 250µm or less AD-60A & AD-60B *C.D. : coating diameter C.D. = 250µm or less : 5 to 20mm *1 250µm < C.D. < =900µm: 10 to 20mm AD-60B 900µm < C.D. < =3mm : 14 to 20mm AD-60A : 5 to 20mm *1
	Fiber holder	Approx. 10mm
Cleave length	Single fiber	Avg. 0.3 to 0.9 degrees
	Fiber ribbon	Avg. 0.3 to 1.2 degrees
Blade life *3		Approx. 60000 fiber cleaves
Physical description	Dimensions W	Approx. 113mm without projection *4
	Dimensions D	Approx. 92mm without projection *4
	Dimensions H	Approx. 54mm without projection *4
	Weight	Approx. 293g including battery and AD-60A
Environmental condition	Temperature	Operate: -10 to 50°C Storage: -40 to 80°C
	Humidity	Operate: 0 to 95%RH non-condensing Storage: 0 to 95%RH non-condensing
		2 pieces of LR03, AAA dry battery
Battery *5		Bluetooth 5.2 LE
Wireless interface *6		1/4-20UNC
Screw hole for tripod		Installed
Holding mechanism for the fiber holder	Blade rotation	Motorized rotation (fully automatic)
		Manual rotation dial
	Replaceable Part	Blade
Other features	Operability	Suitable design for both tabletop and handheld use



### Notes

\*1 When the cleave length is less than 10mm, the coating diameter should be 250µm or less. Also, a blade height adjustment is required before cleaving. The average cleave angle is worse than the specification when the cleave length is less than 10mm.

\*2 Measured with an interferometer at room temperature, not with a splicer. A new blade was used to cleave both the single fibers and ribbon fibers. The average cleave angle changes depending on the environmental conditions, blade condition, operating method, and cleanliness.

\*3 The blade life changes depending on the environmental conditions, operating method, and the fiber type cleaved.

\*4 Measured in a condition when closing the lever.

\*5 Batteries stored in low temperature, high temperature and high humidity environments will have reduced capacity and therefore a shorter battery life.

\*6 Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.

## CT60 Optional Items

Item	Model	Remark
Fiber Setting Plate	AD-60A AD-60B	Max. 900 µm coating Max. 3000 µm coating
Blade	CB10	Blade for replacement
Blade Holder Adapter	BHA-CT60	Tabletop cutting adapter
Fiber Scrap Collector	FDB-05	Scrap collector
Side cover	SC-CT60-10	Side cover instead of scrap collector
Spacer	SPA-CT60-10	Cleave length 10mm
	SPA-CT60-09	Cleave length 9mm



Please visit our web site!

[www.fusionsplicer.fujikura.com](http://www.fusionsplicer.fujikura.com)



Fujikura Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan  
General inquiries, : +81-3-5606-1164 Service & support : +81-43-484-3962  
[https://www.fujikura.com](http://www.fujikura.com)

BS Telekom Ltd.

Erenkoy Mahallesi İğdelidere Cad. 1494. Sok. No:12 Melikgazi 38050 Kayseri, Turkey  
Authorized Distributor, Service & Support Center  
[https://www.bstelekom.com](http://www.bstelekom.com)  
Contact us via E-mail : [sales@bstelekom.com](mailto:sales@bstelekom.com) Phone : +90-352- 2228203